

Technical data sheet


Closed spark gap with lightning current carrying capability



Closed, lightning current carrying spark gap for separation of electrically conductive plant components.

- Connection bolts; \varnothing 10 mm; stainless steel.
- Pulsed current 50 kA (10/350)
- BET

Tested Application: Installation of electrical isolations for external lighting protection and earthing systems, e.g. two earthing systems on account of mutual influence or corrosion (corrosion current prevention).

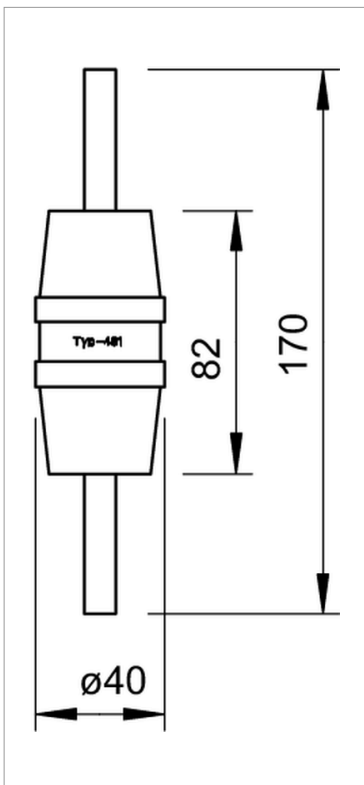


Type	Impulse discharge current (10/350) kA	Nominal discharge current (8/20) kA	Voltage protection level KV	Response voltage KV	Temperature range °C	Pack. pcs	Weight kg/100 pcs.	Art.-No.
481	50	100	< 5	2.5	-20 - +50	1	26.500	5240085

/pc.



Connection-/Circuit diagram

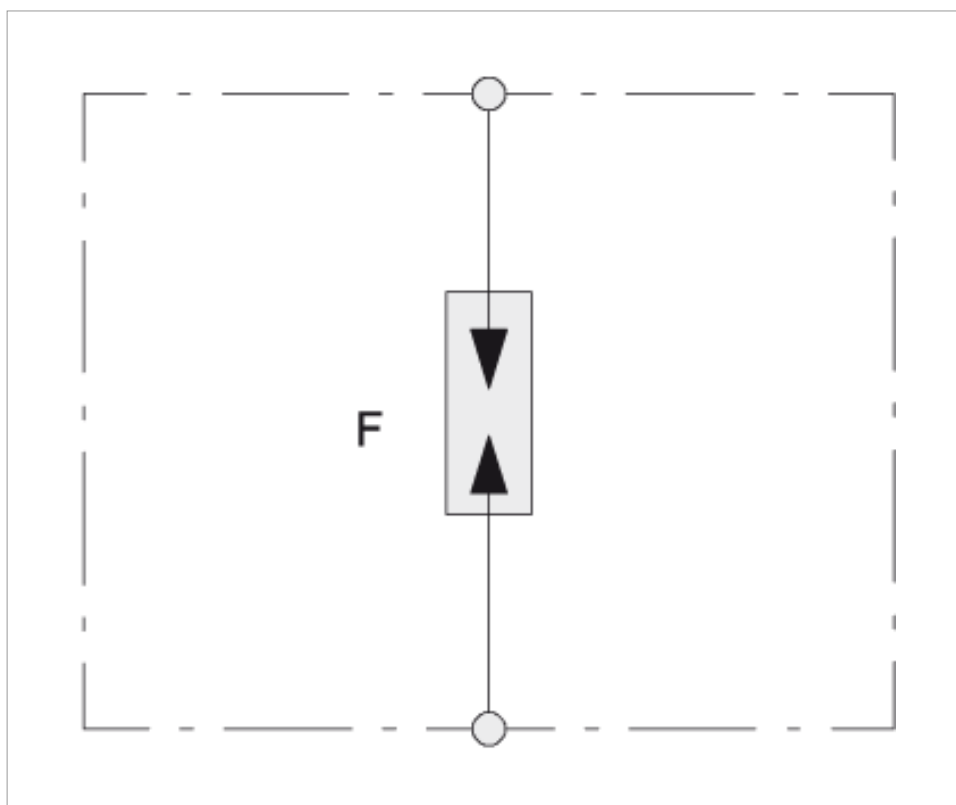

Article number

5240085

Legend



Lightning current-tested



5-year warranty



Communautés Européennes, EC declaration of conformity according to EC directives