


Technical data sheet

Spark gap / surge voltage protection for coupling earthing systems



The FS-V 20 device is a discharge gap with parallel-connected surge voltage protector. It is used to couple different earthing systems. It is connected directly to the equipotential bonding rail concerned.

Application: Coupling earthing systems in data technology sector (functional and operational earthing)

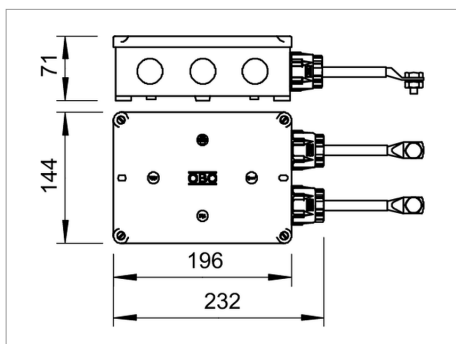


Type	Dimension mm	Max. continuous operating voltage V	Impulse discharge current (10/350) kA	Nominal discharge current (8/20) kA	Voltage protection level kV	Protection rating	Pack. pcs	Weight kg/100 pcs.	Art.-No.
FS-V20	196 x 144 x 71	280	100	100	< 1,5	IP 54	1	170.00 0	509980 3

/pc.



Connection-/Circuit diagram

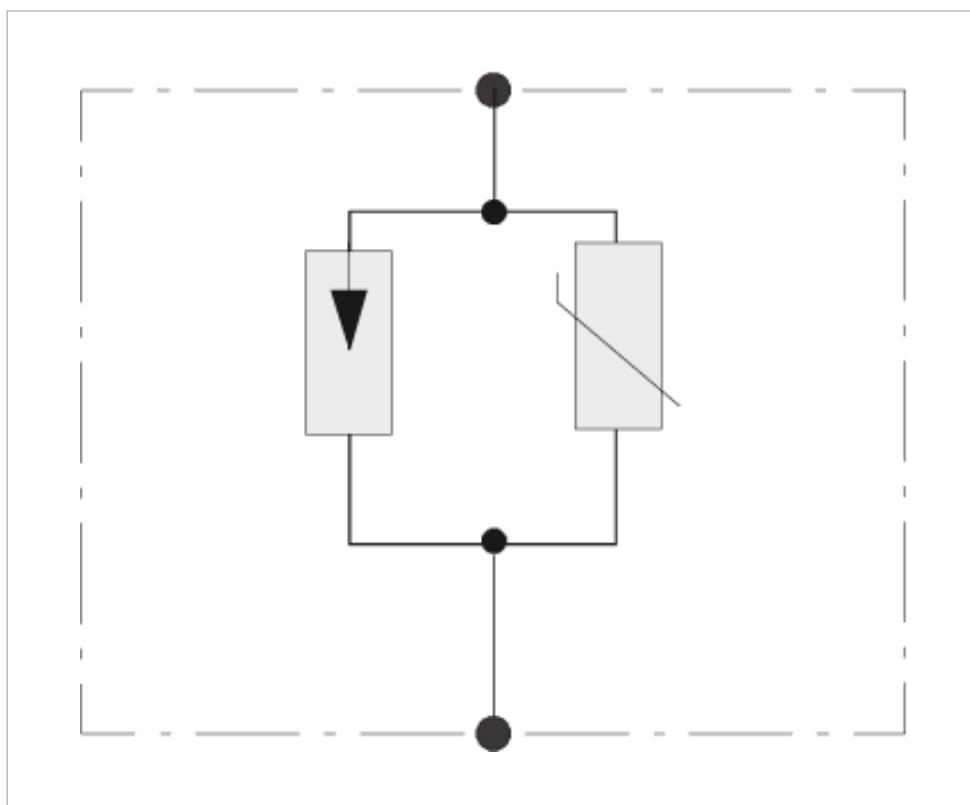

Article number

5099803

Legend



Russia, GOST The State Committee for Standards



5-year warranty