

Technical data sheet

Protective spark gap




Closed spark gap for bridging a proximity point between roof standard of low-voltage system and components of outer lightning protection system


- Protection rating IP 54
- With pre-mounted type 5001 connector for attaching round conductors Rd 8 - 10

Type	Voltage protection level kV	Response voltage kV	Pack. pcs	Weight kg/100 pcs.	Art.-No.
482	< 10 kV	10	1	56.000	5240050

/pc.

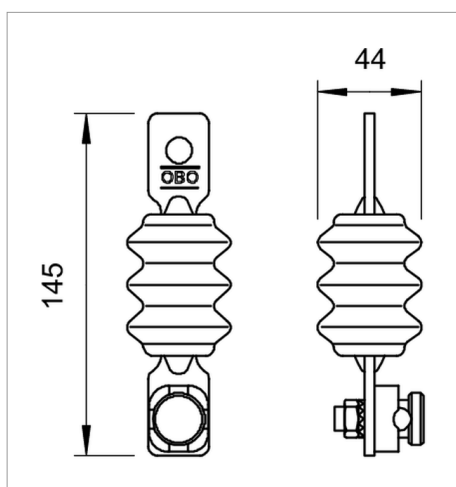

Connection-/Circuit diagram

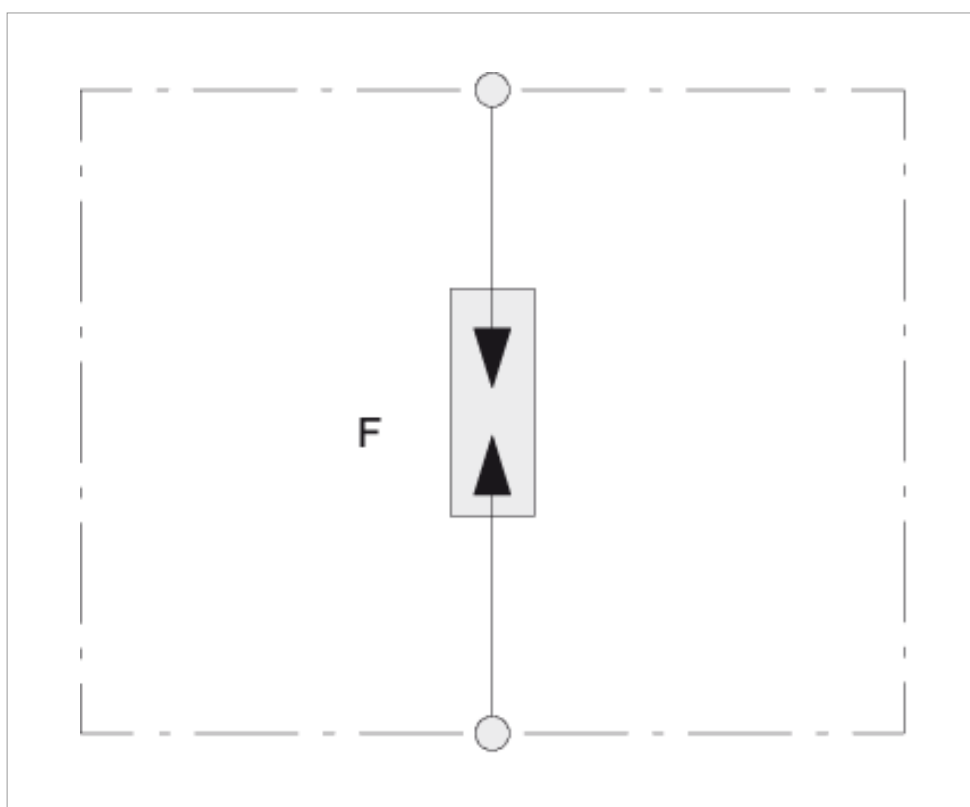

Article number

5240050

Legend

 Communautés Européennes, EC declaration of conformity according to EC directives

 5-year warranty